



Mag Locks, Power Supplies, Keypad, Timer Securitron

32 & M62 Series Magnetic Locks

SECURITRON



32
Face Mount Shown

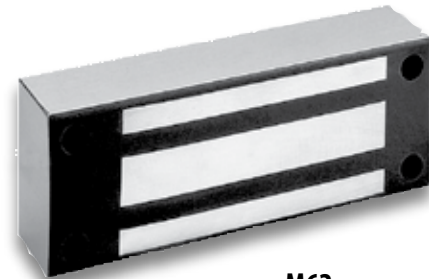

M62
Face Mount Shown


- Operating Temperature: -40 to +60C
- Warranty: MagnaCare Lifetime Replacement Warranty
- Patented instant release circuit, no residual magnetism
- UL Listed
- Fully sealed electronics, tamper proof and weatherproof
- Finish: Brushed stainless steel
- Ten feet of jacketed, stranded conductor
- Automatic dual voltage, no field adjustment required

- 32**
- Holding Force: 600 lbs.
 - Current Draw Voltage: 300mA at 12VDC; 150mA at 24VDC
 - Size: 8"L x 1.88"H x 1.5"D.

- M62**
- Holding Force: 1,200 lbs.
 - Current Draw and Voltage: 250mA at 12VDC; 125mA at 24VDC.
 - Size: 8"L x 2.9"H x 1.75"D"

Mfg #	Holding Force	EZ #
32 24VDC	600	028116
M62 12/24VDC	1200	013349

Power Supplies

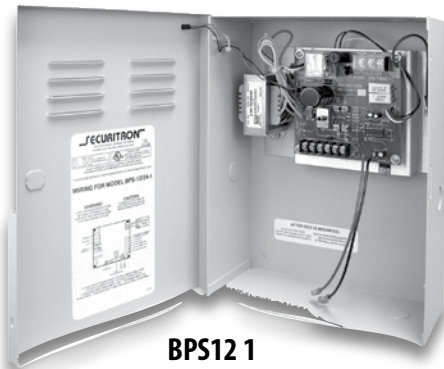

BPS12 1
BPS24 1

- Filtered and regulated DC power supply
- Battery charging circuit operates while providing DC output (battery not included)
- 1 Fused output
- All UL components
- LED power indicator
- Fire alarm interface
- Cabinet Size: 12" x 9" x 4"



B12 5
• 12 Volt 5 Amp hour battery



PSP24
• 350mA 24DC Plug-in power supply.

Mfg #	Description	EZ #
B12 5	5AH 12V Battery	027587
BPS12 1	1 Amp 12V Power Supply	013333
BPS24 1	1 Amp 24V Power Supply	013334
PSP24	24DC Plug-in Power Supply	028252

Keypad & Accessories

DK26SS



- Weather & vandal resistant unit is cast stainless steel with 11 EPDM rubber keys
- Fits narrow stile mullion.
- Digital Keypad System circuit board mounts in a metal enclosure provides for 59 multiple users, expandable to 119
- 5 Amp DPDT relay output for lock control and alarm shunt, or other device interface, has REX input.
- 16' 12 conductor, 22 gauge keypad cable
- 3 LEDs and bell button
- Current Draw: 7mA@ rest, 160mA active, 12VAC or VDC 20mA@ rest, 190mA active, 24VAC or VDC
- Operating Temperature: CPU 0 to +70C, Keypad -30 to +70C.



DT7



- 7-day digital timer used to turn electric locks on and off at programmed times.
- 12 or 24 VAC or VDC
- "First Man In" feature

Mfg #	Description	EZ #
DK26SS	Keypad	060615
DT7	Timer	027586
PB3 [SECM]	Exit Button	028797

- 10 Amp DPDT relay can be operated in toggle or pulse mode
- 12 programmed on/off times set daily (6 on, 6 off), on selected days, or on blocks of days.



PB3 [SECM]

- Size: 4-1/2" x 2-3/4"
- 3 Amp, DPST, UL listed contacts can be converted to DPDT in the field.
- Supplied with plastic back box.
- Bi-colour illumination