


# Access Control & Telephone Entry System Keri Systems

## KXL500P & W Tiger Access Control System

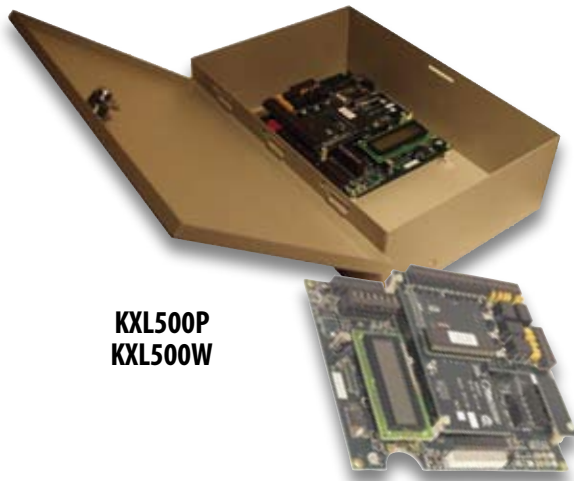

**KXL500P  
KXL500W**

- KXL500P & KXL500W**
- Expandable up to 256 doors at a single site
  - System is managed by Keri's Doors™ for use with Windows™ software for managing users, doors, & access.
  - PXL-500 contains input/output functionality necessary to manage a single door: Lock Relay, Door Sense, Request-to-Exit, Two Reader Inputs, & Alarm output.
  - The system is capable of 32 time zones with intervals, & 32 holidays, unlimited access groups, 65,000 Cardholders & 3,600 buffered Events.
  - Controller has RS-485 port for connection to other PXL-500's and an RS-232 serial port for connection to a PC which connects with the first PXL-500 on the network.

- Includes Doors software, enclosure, and board to control one door
- Power Requirements: 500mA @ 12VDC Power supply (not included).
- KXL500P works with Keri proprietary format proximity readers MS3000 & MS5000BX (not included).
- KXL500W works with any 26 bit Wiegand format reader (not included).

**SB593**

- Expansion board plugs directly onto the PXL-500 to provide an additional 8 general purpose inputs and 4 general purpose outputs.
- Board can be used to add another reader for another door or be configured to allow for additional relay controls for the first door.



**MS3000**

**MS5000BX**

- Ultra-thin profile
- Dual LED & Piezo confirmation for read valid & invalid credentials
- Read Range (Up To): MS5000BX - 7", MS3000 - 4"



**KC10X**

**PKT10X**

**KC10X**

- Can accept PVC "label" with printed graphics and photo
  - Sequentially numbered
- PKT10X**
- Reinforced eyelet
  - Washing machine tough
  - Sequentially numbered

## Telephone Entry System



**EG  
TITANIUM**

**RMK65**

- Visitors are able to "buzz" visitors in from their unit telephone or by using their mobile phone.
- Tenants can gain access to their building via PIN code if needed.
- Capacity of 750 tenants
- 4 line backlit LCD
- Programmed and reporting from supplied "Doors"

software.

- Can be integrated with other Access System hardware using Rex output of access system
- May accept postal lock with optional kit.
- Stainless steel housing.
- Requires telephone line
- Power Requirements: 1.5A @ 12VDC Power supply (not included).

Mfg #	Description	Size (HxWxD)	Colour	EZ #
<b>Controllers</b>				
PXL500P	Proprietary Keri Format	13" x 9" x 4"	Beige	080403
PXL500W	26 Bit Wiegand	13" x 9" x 4"	Beige	080404
SB593	Expansion Satellite Board			083419
<b>Readers</b>				
MS3000	Mullion Mount	3.4" x 1.4" x 0.38"	Black	068438
MS5000BX	Gang Mount	4.3" x 3.0" x 0.38"	Black	068439
<b>Proximity Credentials</b>				
KC10X	Keri Format Light Card	2.15" x 3.75" x .059"	White	069859
PKT10X	Keri Format Fob	1.506" x 1.15" x .155"	Grey	069814

Mfg #	Description	Size (HxWxD)	EZ #
EG TITANIUM	Entry System	12.09" x 5.6" x 3.1"	085936
RMK65	Recessed Housing		086626